


A Division of Thiessen Products

INSTRUCTION SHEET FOR JIMS NO.3000, 3001, 3002,

3003, 3004, & 3005

PUSHROD COVER SET TWIN CAM & EVO BIG TWIN

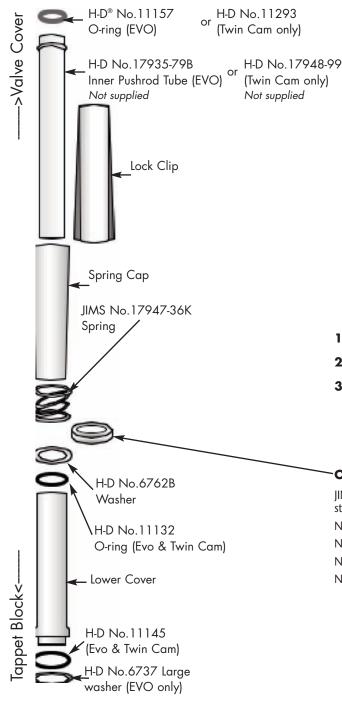



- 1. Assemble as shown.
- 2. For pushrod adjustment, refer to the manufacturer's instructions.
- 3. If you have longer than stock cylinders, use the appropriate spacers listed below depending on your actual cylinder height. Order separately.

Optional Spacers for Stroker Cylinders

JIMS[®] spacers are used to space up the pushrod covers when taller than stock cylinders are used. Available in four sizes.

No.1093SP4K - .275 Thick - Pack of 4. No.1093SP3K - .225 Thick - Pack of 4. No.1093SP2K - .200 Thick - Pack of 4. No.1093SP1K - .155 Thick - Pack of 4.

CAUTION: WEAR SAFETY GLASSES. EXCESSIVE FORCE MAY DAMAGE PARTS! ,SEE JIMS® CATALOG FOR OVER 200 OTHER TOP QUALITY PROFESSIONAL TOOLS. THE LAST TOOLS YOU WILL EVER NEED TO BUY.

"From the Track... To the Street!"

555 DAWSON DRIVE, CAMARILLO, CA 93012 • PHONE 805-482-6913 • FAX 805-482-9224

VISIT US ON THE WEB AT WWW.JIMSUSA.COM