



A Division of Thiessen Products, Inc.

## INSTRUCTION SHEET FOR TOOL #937



7MM GUIDE REMOVER AND INSTALLER  
HANDLE TOOL

← 937

No.937 - Use on all Twin Cam® 2005 and later that use the 7mm valve guides. Use on 2004 and later Sportsters®, and on 2004 to present Buell® Twins, except 1150R.

**Note:** Please read all instructions completely and thoroughly before performing any work. JIMS® is not responsible for damage, injury, quality or the safety of your work.

This valve guide should be removed from the valve spring side of head. Removing from this side eliminates any need to remove the carbon from the intake or exhaust port side of guide. The other use of this tool is with JIMS® guide installer, tool No.938. Use to hold and set the depth of the new guide being installed from the valve spring side of head.


Perform all work Per H-D® service manual for appropriate year and model for the motorcycle you will be repairing. See JIMS® catalog for a complete listing of all engine and transmission tools.

### REMOVAL PROCEDURES

1. Refer to H-D® Service Manual for guide removal.
2. Use with arbor press, like JIMS® No.944 for best results.

*Performance Parts For Harley-Davidson Motorcycles*

555 DAWSON DRIVE, CAMARILLO, CA 93012 PHONE 805-482-6913 • FAX 805-482-7422

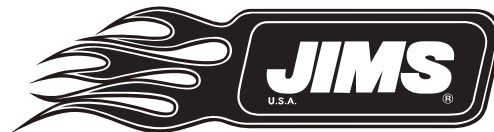

A Division of Thiessen Products, Inc.

## INSTRUCTION SHEET FOR TOOL #937



7MM GUIDE REMOVER AND INSTALLER  
HANDLE TOOL

← 937

No.937 - Use on all Twin Cam® 2005 and later that use the 7mm valve guides. Use on 2004 and later Sportsters®, and on 2004 to present Buell® Twins, except 1150R.

**Note:** Please read all instructions completely and thoroughly before performing any work. JIMS® is not responsible for damage, injury, quality or the safety of your work.

This valve guide should be removed from the valve spring side of head. Removing from this side eliminates any need to remove the carbon from the intake or exhaust port side of guide. The other use of this tool is with JIMS® guide installer, tool No.938. Use to hold and set the depth of the new guide being installed from the valve spring side of head.

Perform all work Per H-D® service manual for appropriate year and model for the motorcycle you will be repairing. See JIMS® catalog for a complete listing of all engine and transmission tools.

### REMOVAL PROCEDURES

1. Refer to H-D® Service Manual for guide removal.
2. Use with arbor press, like JIMS® No.944 for best results.

*Performance Parts For Harley-Davidson Motorcycles*

555 DAWSON DRIVE, CAMARILLO, CA 93012 PHONE 805-482-6913 • FAX 805-482-7422