




A Division of Thiessen Products, Inc.

**INSTRUCTION SHEET FOR TOOL #94660-37A**

**MAINSHAFT SPROCKET NUT SOCKET**

USE ON BIG TWIN - 1936-PRESENT, 4 & 5 SPEEDS.

USE ON JIMS RIGHT SIDE DRIVE TRANSMISSION.

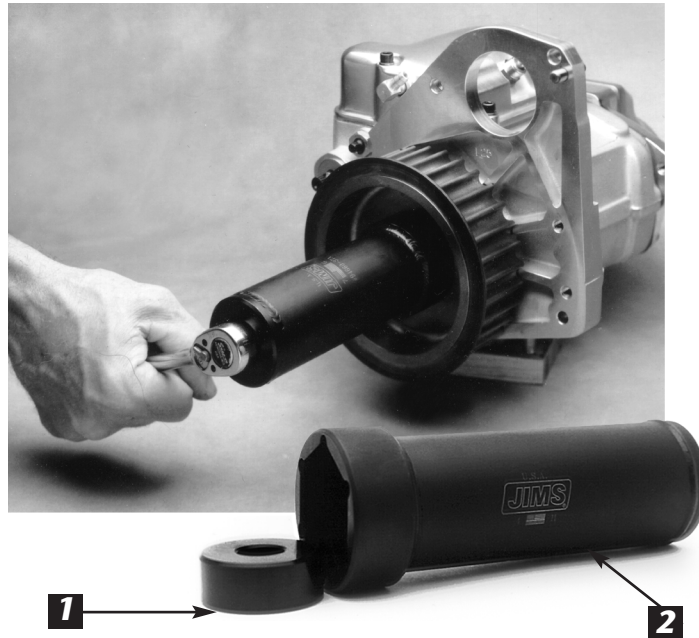

Refer to H-D® Service Manual for specifications.

This tool will easily remove and install the left hand threaded nut that holds the trans sprocket on. The pilot is designed to be threaded onto the left-hand thread of the main shaft with the pilot in place. This will stop the tool from slipping when torquing. See H-D® Service Manual for torque specs. Apply lube to threads of tool.

This wrench is also used to drive nut No. 1026B, for tool No. 97225-55 and No. 97081-54, to install Timken® Bearing on sprocket shafts.

**PARTS AVAILABLE SEPARATELY**

No.	Qty.	Description	Part No.
1	1	INNER COLLAR	94660-37A-2
2	1	WELDMENT	94660-37A

**CAUTION: WEAR SAFETY GLASSES. EXCESSIVE FORCE MAY DAMAGE PARTS!  
SEE JIMS® CATALOG FOR HUNDREDS OF TOP QUALITY PROFESSIONAL TOOLS.  
THE LAST TOOLS YOU WILL EVER NEED TO BUY.**

*Performance Parts For Harley-Davidson® Motorcycles*

555 DAWSON DRIVE, CAMARILLO, CA 93012 PHONE 805-482-6913 • FAX 805-482-9224

VISIT US ON THE WEB AT WWW.JIMSUSA.COM